



Release notes for build 1.3.8054

Evaluation expires 30/4 2009


- Corrected task kill functionality
- New Audit functionality

Corrected task kill functionality

.A user is now correctly allowed to kill a process owned by **System** if he actually owns the necessary credentials.



New Audit functionality

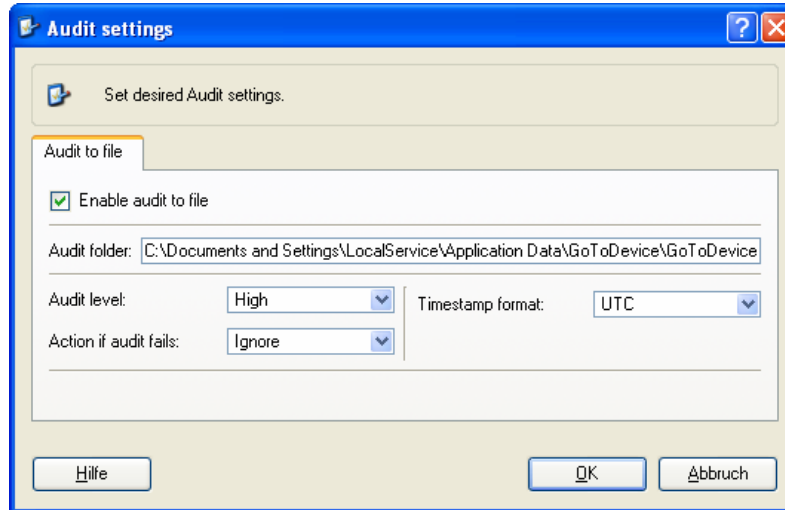

The Node is now able to audit different events to a file.

- An Audit setting has been added to “Additional Node Security”

The settings:

- Audit folder, specifies the location of the folder where the audit files will be created.
- Audit level. Three different levels of Audit can be specified.
 - Low, audits all communication, get support and logon events
 - Medium additionally creates and audit file for each session to the Node and audits User actions like kill of task, change of Service properties and change of Security settings.
 - High, additionally audits all browse and transfer events in the Session audit file
- Actions if audit fails, can optionally disconnect the session to the remote user if, for some reason, the write to the file fails.
- Timestamp format. All timestamp are in ISO 8601 format, this settings specifies if the timestamp used should be in local time or UTC