




## Release notes for build 1.3.8061

Evaluation expires 30/6 2009

- Audit text translated to German
- Desktop handle leak fixed, affected Vista and Windows 7
- Updated User guide.



## New Audit functionality

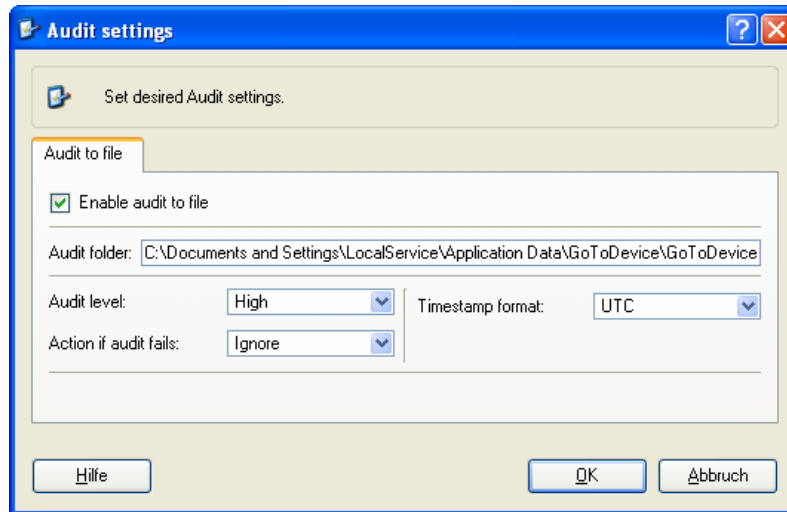

The Node is now able to audit different events to a file.

- An Audit setting has been added to “Additional Node Security”

The settings:

- Audit folder, specifies the location of the folder where the audit files will be created.
- Audit level. Three different levels of Audit can be specified.
  - Low, audits all communication, get support and logon events
  - Medium additionally creates an audit file for each session to the Node and audits User actions like kill of task, change of Service properties and change of Security settings.
  - High, additionally audits all browse and transfer events in the Session audit file
- Actions if audit fails, can optionally disconnect the session to the remote user if, for some reason, the write to the file fails.
- Timestamp format. All timestamp are in ISO 8601 format, this settings specifies if the timestamp used should be in local time or UTC